

LENGTH L DATA (LENGTH L IN SIXTEENTHS OF AN INCH)

CODE	8	9	10	11	12	13	14	15	16	18	20	22	24
L	.500	.562	.625	.687	.750	.812	.875	.937	1.000	1.125	1.250	1.375	1.500
D MIN	.400												
	.472												

THREAD INSERT MATERIAL AND FINISH DATA

CODE	MATERIAL	SPEC.	PASSIVATE	DRI-FILM LUBE
CR	A-286 CRES	AMS 5525, 5726, 5732, 5737	AMS 2700	AS5272 TY 1

STANDOFF AND BASE MATERIAL

CODE	MATERIAL
U	30% GLASS/PEI
V	40% GLASS/PEI
P	GLASS/PEEK
K	GLASS/PEKK

OPTIONAL BASEPLATE PRIMER


CODE	MATERIAL SPEC.
P	MIL-PRF-85582

THREAD T DATA

CODE	THREAD SIZE	H MAX	R MIN
08	.1640-32 UNC-3B	.300	.100
3	.1900-32 UNF-3B	.300	.100

EXAMPLE PART NUMBER

CB4002 V 3 CR 8 P H 750

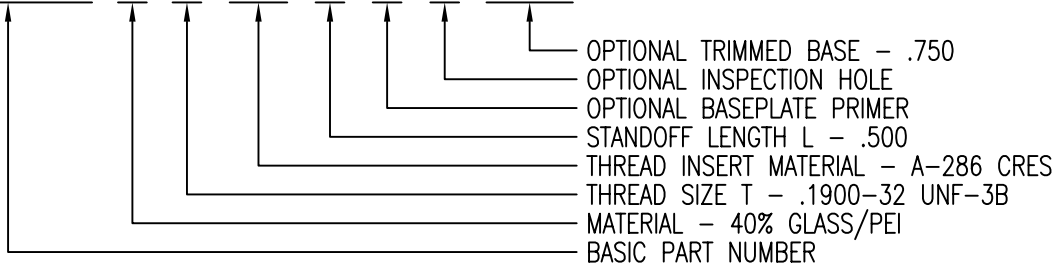

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

GLICK BOND

CARSON CITY
NEVADA 89706

APPROVALS		DATE	
ANGLES	±1°	DRAWN	DAC
.XX	±.03	CHECKED	DAC/John
.XXX	±.010	RELEASED	CGH
.XXXX	±.001	REVISED	DAC
			7FEB06

TITLE STANDOFF, LOCKING THREAD, COMPOSITE			
SIZE	CAGE CODE	DWG. NO.	REV.
A	66530	CB4002	5
SCALE	1/1	7FEB06	SHEET 1 OF 1